



SEAC AB



SEAC FPM-500

The automatic feeder SEAC FPM-500 was designed for the automatization of the fish processing machines SEAC FPM-200 and SEAC FPM-400. It includes hopper, elevator, return conveyor and guiding unit.

The feeder guide the pelagic fish – sardine, mackerel, herring and similar – into the pocket conveyor of nobbing machine SEAC FPM-200 (see picture on this page) or nobbing and filleting

machine SEAC FPM-400 (see drawing on the opposite side). It needs only one operator for running the entire line in order to control, correct and add the fish into the empty pockets.




SEAC AB


Z-shape

180°

C-shape

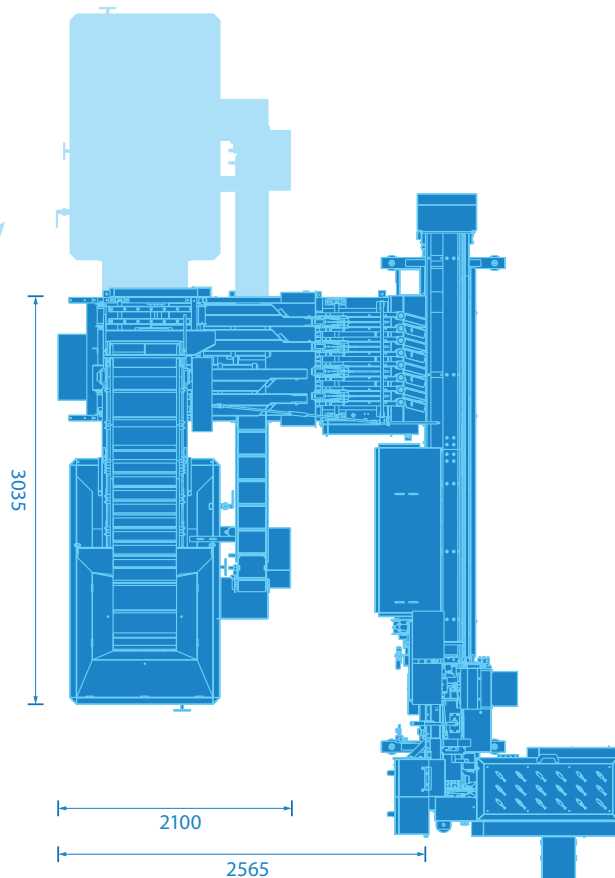

The feeder works in a range 2–25 fish/kg; the capacity is from 150 up to 300 fish per minute correspondingly.

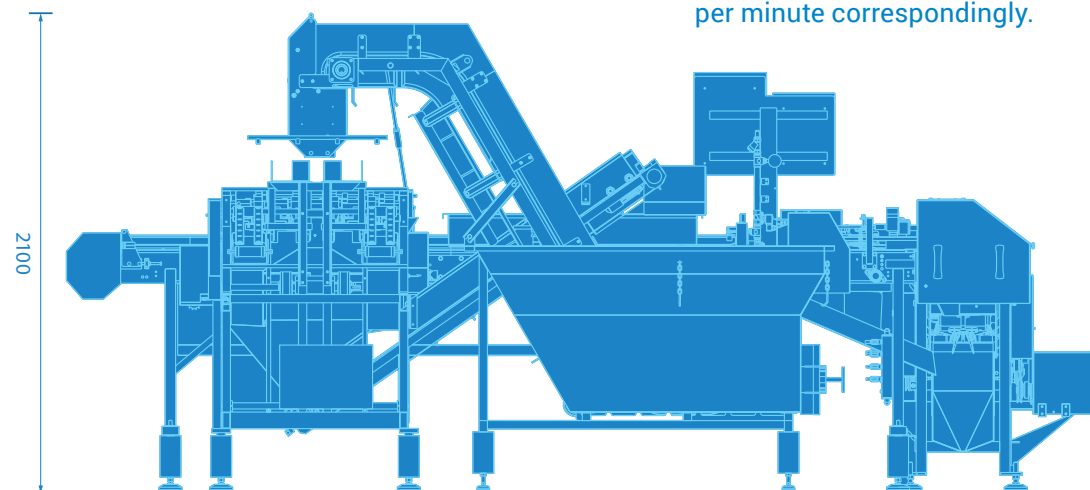

Technical data

Water consumption up to 15 l/min.
Pressure not less than 3 bars.
Electricity – 380 V, 3 phases, 50/60 Hz.
Consumption 2.37 kW.

SEAC AB

Slånbärsvägen 4
SE-386 90 Öland, SWEDEN
E-mail: info@seac.se, seac@mail.ru

Telephone: +46 485 35 200
+46 485 34 690
Mobile: +46 720 168 758

www.seac.se

Investing in your future



EUROPEAN UNION
European Regional
Development Fund